

Fibre hardware Installation and basic configuration (using the quick setup wizard).

D-Link DWM-965M Fibre installation steps.

01 For the Fibre service

Connect the Ethernet cable supplied with your Fibre device (ONT) to a LAN port on the ONT. Then connect the other end of the cable to the blue WAN port on the back of the router.



02 The power

Connect the power connector of the power supply to the power socket at the back of the router. Plug the power supply into the wall outlet. Switch the wall outlet and the router on.

Fibre hardware Installation and basic configuration (using the quick setup wizard).



03 Setup the router

You can set up your router using either Wi-Fi or an Ethernet cable.

Ethernet cable:

Connect the yellow RJ-45 Ethernet cable to any yellow LAN port at the back of the router and the other end into your PC LAN port.

Wi-Fi:

Use the default Wi-Fi SSID and password (WPA Key) printed on to the router to connect your Wi-Fi enabled device to the router.

Fibre hardware Installation and basic configuration (using the quick setup wizard).




04 Use a browser for configuration

Launch an Internet browser (Google Chrome, Firefox, Internet Explorer, Safari, etc.) on your connected device.

In the URL web address field, type **10.0.0.2** and press enter.

The Quick Setup wizard will start automatically. Please follow the steps of the wizard to finish the configuration of the router

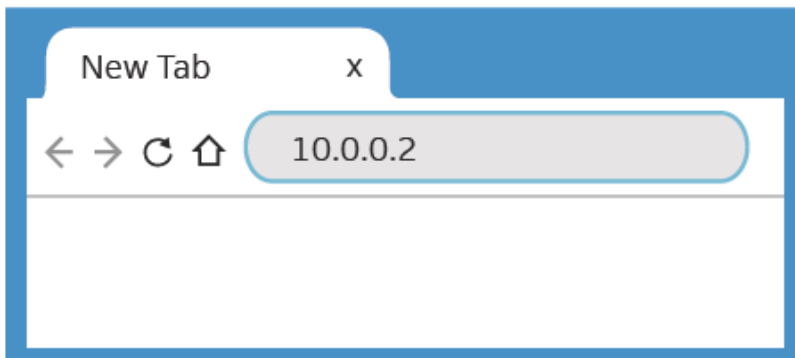

05 Fibre setup

A. On **Step 1** of the Quick Setup Wizard select **ETH** from the drop-down menu.


B. Click **Test** to verify that your Fibre is connected correctly.

C. If a green message confirms "Hardware interface connected properly" click **Next**.

Fibre hardware Installation and basic configuration (using the quick setup wizard).

Note: If a red message appears stating "Connection failure" please confirm that the cable from the LAN port on the Fibre ONT device has been inserted into the Blue WAN port on the back of the router.

Continue to Step A1 / B1

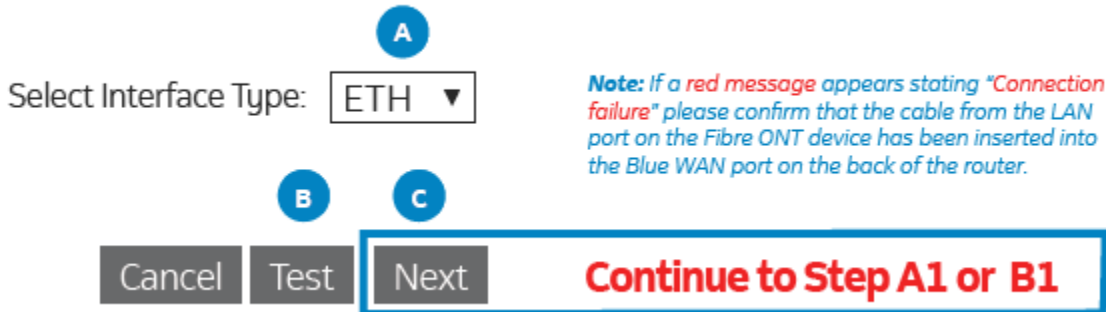


A1 DHCP test passed!

Step 2

The router will now run a test to determine which account type you have.

If DHCP test passes, click Next to set your **Wi-Fi name & Password**.

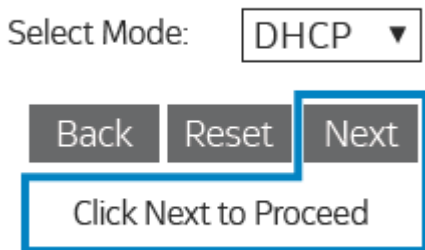


----- OR -----

B1 PPPoE test passed!

Step 2

The router will now run a test to determine which account type you have. If PPPoE test passes, click Next to go to **step B2**

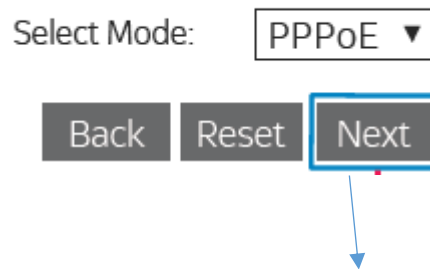

B2 ISP Account Username & Password

Account Details

Your Internet Service Provider (ISP) Account Username & Password will be **supplied to you by your ISP (usually via SMS)** and will look similar to the below: **yourname@telkomsa.net**

Fibre hardware Installation and basic configuration (using the quick setup wizard).

ISP Account Username & Password

User Name:

Password:

Confirm Psw:

Note: The Username & Password will never be Admin and Admin

Click Next to Proceed

06 Wi-Fi name & Password

Step 3

Set a Wi-Fi name (**SSID**) and Password (**WPA password key**) for both the 2.4GHz and the 5GHz. It is recommended to have a **different name** for the 2.4G & 5G band. For the difference between 2.4G & 5.8G please refer to the FAQ.

Wi-Fi name & Password

SSID 2.4GHz:

2.4G WPA key:

SSID 5GHz:

5G WPA key:

07 Web login details

Step 4

Set an **Admin Name & Admin Password** for logging into the router. These details allow you to log into the router if you want to change any settings.

Fibre hardware Installation and basic configuration (using the quick setup wizard).

Web login details

AdminName:

AdminPassword:

Confirm Password:

08

Step 5

Please make sure to write down all the details on this page & keep it somewhere safe for you to refer back to later.

Web Login Name:

Web Login Password:

SSID 2.4GHz:

2.4G WPA Preshare key:

SSID 5GHz:

5G WPA Preshare key:

Be sure to Click Apply to Save